

# High-Speed Single or Dual-Sided Plastic Card Printer

By NBS Technologies

## ImageMaster™ D-40



**HIGH-SPEED SINGLE OR DUAL-SIDED PLASTIC CARD PRINTER WITH FEATURES & PERFORMANCE THAT PERFORMS WELL IN EVEN THE MOST DEMANDING ENVIRONMENTS**



**THE IMAGEMASTER™ D-40 OFFERS THESE KEY FEATURES AND BENEFITS:**



### COMPACT AND FLEXIBLE

- Delivers fast monochrome printing: up to 4000 cph single-sided & 1500 cph dual-sided
- Programmable card cleaning to help maintain quality
- Can operate as a stand-alone unit with keyboard



### NETWORK AND ENCODING

- Supports Ethernet and Serial connectivity
- Options for magnetic encoding & smart card personalization
- Contact, Contactless or both



### EASY-TO-USE

- 500 card auto-feed input hopper & auto-unload stacker
- LCD screen displays printer status and diagnostics
- Easy to change ribbon and thermal print head
- Clear card support is standard

CONSULTING

SOFTWARE

**HARDWARE**

SMART CARD MANUFACTURING



Total  
Card Solutions


WWW.NBSTECH.COM

## Printer Specifications

<b>Single/Dual-sided</b>	Fast, monochrome printing single-sided and double-sided printing
<b>Print method</b>	Thermal transfer (mono)
<b>Card encoding options</b>	SmartSys™ Tabletop batch issuance software designed especially for NBS desktop card printers, Magnetic encoding: 3 track, Dual Coercivity, ISO 7811, Bit to Bit (binary), Smart Card ISO 7816 personalization, Thin card kit for 0.015" (0.38mm) and 0.020" (0.51 mm) cards, Contactless (RF) Mifare card
<b>Warranty</b>	12 month
<b>Printer interfaces</b>	Two-line, 40-character LCD Keyboard for manual data entry, RS-232C Serial 9 Pin; Ethernet 10/100bT, TCP/IP printing using LPR/LPD or Raw socket
<b>Software drivers</b>	Supports online printing from a variety of host computers including PC running Microsoft Windows 7, XP and AS-400  Supports both internally generated layouts using ASCII text fields from host computer, or full Microsoft Windows® compatibility with Windows 7, Windows XP and Windows 2000 drivers.  Supported by NBS SmartSys™ Tabletop machine control software, a user-friendly, Windows card design and production application, ideal for batch issuance.
<b>Fonts/Images</b>	300 dots per inch (11.8 dots per mm) resolution. Full range of monochrome color ribbons (full and half widths) available.  Shipped with Swiss Regular: 6, 8, 10, 14, 18, 24 pt, Swiss Italics: 6, 8, 10, 14 pt, OCR-A: 10, 12 pt, Dutch Bold: 6, 8, 10, 18, 24 pt, Any True-Type font can be downloaded from Microsoft Windows to support customized fonts  PC Dash Board software for use in downloading additional fonts and images also used for flash loading of firmware for easy updates. It also can be used to back the machine settings.
<b>Barcodes</b>	EAN 13 & 8, UPC-A, Code 39, Codabar, Code 128, Code 12 of 5
<b>Card capacity</b>	500 - auto-card feeder input hopper, 500 - auto-unload stacker, 25 - reject tray, Two production counters, one re-settable
<b>Weight</b>	70 lbs (31.8kg)
<b>Power source</b>	110-230 Volts, 50-60 Hz FCC Class B, CE and ETL approved
<b>Dimensions</b>	16" (407mm) D x 24" (610mm) W x 23" (585mm)
<b>Environment</b>	Operating temperature: 15°C to 30°C, Relative humidity: 20% to 65% non-condensing, Storage temperature: -5°C to 70°C, Storage humidity: 20% to 70% non-condensing, Ventilation: Free air
<b>Monochrome Print speed</b>	Single-sided: Up to 4000 cards per hour, Dual-sided: Up to 1500 cards per hour  Automatic card cleaning mechanism with user configurable cleaning

## Card Specifications

<b>Types</b>	PVC & composite PVC - including breakaway and key cards
<b>Maximum print area</b>	0.100" +/- 0.010" from side edges of card01
<b>Card width/length</b>	ISO CR-80-ISO 7810: 53.98mm (W) x 85.60mm (L) / 3.375" x 2.125"
<b>Card thickness</b>	0.024" (0.61 mm) to 0.030" (0.76mm) , (Optional)Thin card kit for 0.015" (0.38mm) and 0.020" (0.51 mm) cards

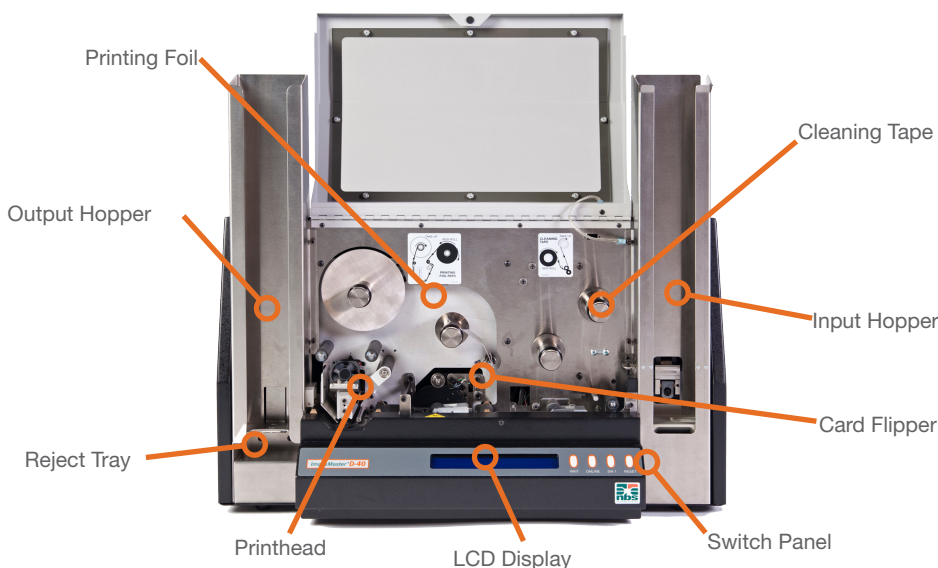

The **ImageMaster D-40** works in line with our **NBS-1500** Mailing System to create a low-cost issuance & fulfillment system.



w: www.nbstech.com  
e: info@nbstech.com

Corporate Headquarters  
Canada  
703 Evans Avenue  
Toronto, Ontario  
M9C 5E9  
Canada  
tel: +1 416.621.1911  
fax: +1 416.621.8875

Contact our NBS card personalization experts for full details on this and other card personalization products at:

Europe, Middle East, Africa  
B1 Moorfield Point  
Slyfield Industrial Park  
Guildford, Surrey GU1 1RU  
United Kingdom  
tel: +44 (0)1483 563200  
fax: +44 (0)1483 511189

North / South America  
10925 Bren Road E  
Minneapolis, MN 55343  
USA  
tel: +1 416.840.8620  
fax: +1 952.912.9439

Asia Pacific  
PO Box 780  
Hurstville BC  
NSW 1481  
Australia  
tel: +61 (2) 9546 6841  
fax: +61 (2) 9546 6851